



ENGINE

Make	: KUBOTA
Type	: V2403M-T-EU4 D Diesel Engine
Number of Cylinders	: 4 in line
Bore & Stroke	: 87 x 102.4 mm
Displacement	: 2434 cm ³
Maximum Power	: 44 kW, 59 HP (2700 rpm)
Maximum Torque	: 160 Nm (1600 rpm)

High power and torque output, water cooled turbocharged diesel engine.

Compatible with USA EPA Tier 4 Interim European EU Stage III-A exhaust gas emission regulations

DRIVE SYSTEM

- Servo controlled Axial Piston Variable Displacement Double Pumps driving Radial Piston, Multi-stroke hydraulic motors enabling forward and reverse motion.
- Service Brake is provided by Hydraulic Driving System
- Spring on, hydraulic pressure off park brake system
- Travel speeds 0-12 km/h forward and reverse.

CAB & HOOD

- Ergonomic & Esthetic Interior Design provides maximum space
- Wide Visual Angle
- Full Rops /Fobs cab with sound proofing
- Two joysticks for all controls ergonomically mounted on seat
- Air conditioner
- Multi-functional Seat with seatbelt
- Easy to read full color LCD display
- Ergonomic & Elegant hand and foot Throttle
- Battery isolator
- Ease of service maintenance
- Well protected fuse box inside the operator cab



HYDRAULIC SYSTEM

Main Pump Flow	: 61 lt/min (2700 rpm)
Pressure	: 220 bar
Travel pump Flow	: 243 lt/min (2700 rpm)
Pressure	: 400 bar

CONTROLS

Ergonomic servo controlled joysticks mounted on the seat control driving and front loading operation. Same joysticks also control backhoe operation when the operator seat is turned to backhoe side.

TIRES

Front	: 10 x 16.5 10 Pr Skz
Rear	: 10 x 16.5 10 Pr Skz


OPERATING WEIGHT

Operating weight (with standard equipment * : 3.800 kg

* Operating weight (includes machine equipped with 420 mm backhoe bucket, shovel without forks, with 75 kg operator weight and full fuel tank.



HMK 62 SS

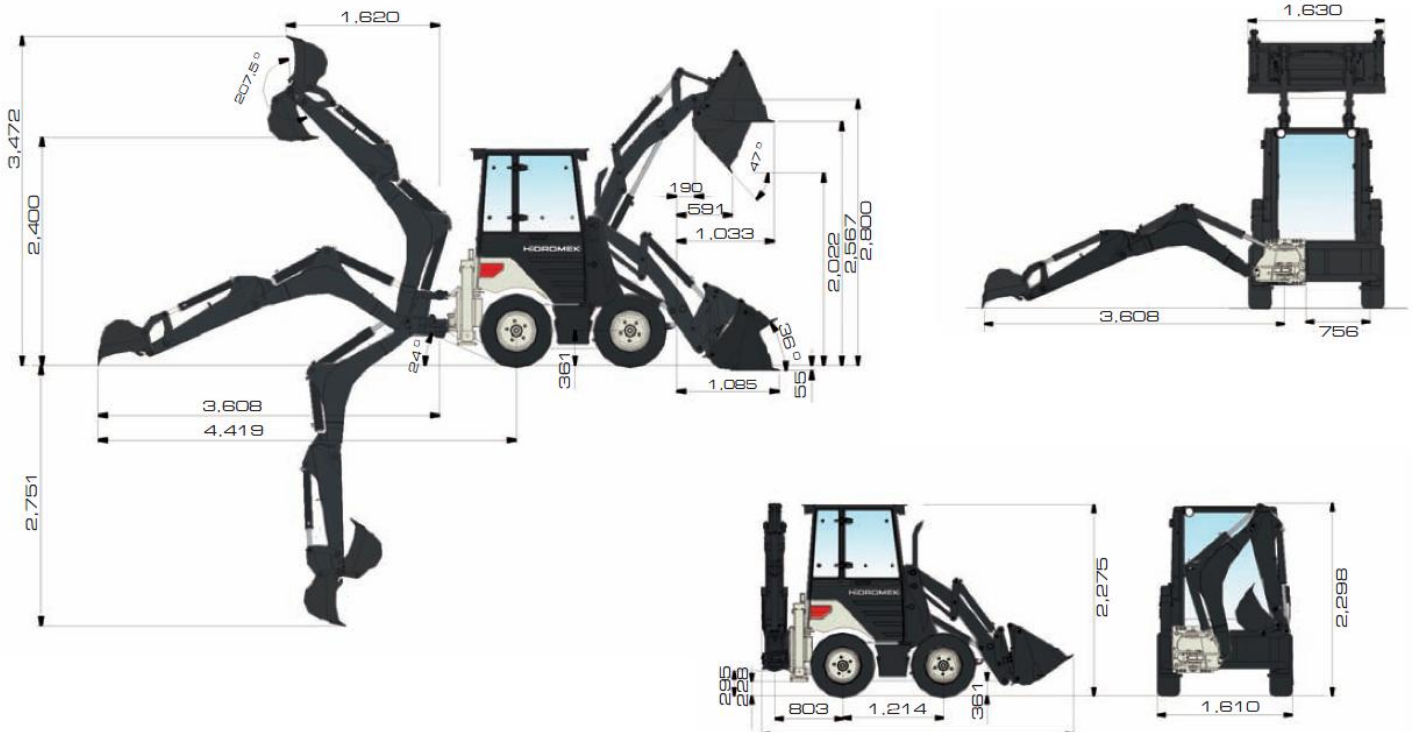

LOADER PERFORMANCE	
4 in 1 bucket capacity (m ³)	0.35
Max. bucket breakout force (kgf)	2883
Max. loading arm breakout force (kgf)	3250

BACKHOE PERFORMANCE	
Bucket capacity (m ³)	0.06
Max. bucket breakout force (kgf)	2692
Max. dipper breakout force (kgf)	1643
Lifting capacity to maximum height (rear) (kg)	332

STANDARD EQUIPMENTS

- Rops / Fops cab
- 4 in 1 Bucket
- LCD Display
- Mechanical loader quick hitch
- Auxiliary hydraulic supply to loader
- Seat mounted servo controlled joysticks
- Self levelling
- Rotating beacon
- Battery isolator
- Reverse alarm
- External mirrors
- Working lights
- Road lights
- Seatbelt
- Air conditioner
- Hydraulic breaker installation line



Attachments



Hydraulic Breaker



Dozer Blades



Standard Bucket



Forks Mounted on Quick Coupler

24/7
CUSTOMER SERVICE
ANYTIME. ANYWHERE.



Corporate Headquarters:

POWERKING

476 Edsa, Caloocan City

Tel. No.: **+632 364-6092**

Fax. No.: **+632 365-7460**

Email: sales@powerking.com.ph

www.powerking.com.ph

Regional Offices:

POWERKING

Subic

Lot3, Boton Area, Subic District,
Argonaut Highway, Subic Bay
Freeport Zone

Tel. No.: **(047) 250-2331**

POWERKING

Cebu City

Ridgedale Subdivision
Tac-an Road, Talamban,
Cebu City

Tel. No.: **(02) 364-6092** (Manila)

POWERKING

Cagayan De Oro

National Highway, Brgy. Ipit,
Municipality of Opol,
Misamis Oriental

Tel. No.: **(088) 305-0032**